

VISIT SITE NOW >>

Designed for continuous operations, excellent performance and easy maintenance, DAE Clifton series pumps have proven their reliability and durability in demanding areas like construction, mining, tunnelling, quarries, industries and rental applications.

60 Hz



Dewatering Pump

Clifton 4220

High Chrome Dewatering Pump




VISIT SITE NOW >>

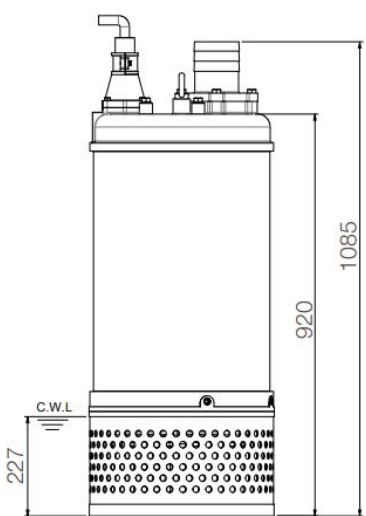

unit : mm

Weight : 256kg / 564 lbs

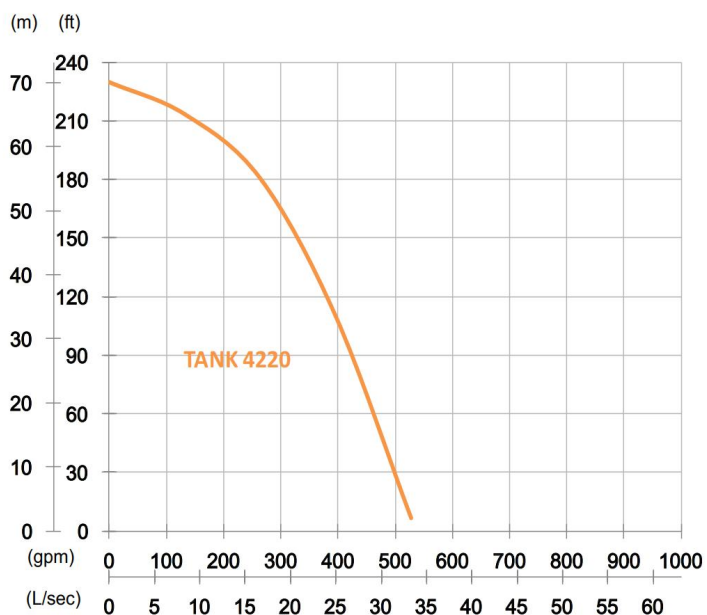

Shaft Speed : 3450 rpm

Outlet : 100mm, 4in

OUTPUT	HEAD	FLOW
22 kW	Rated : 55m, 180ft	Rated : 16.7 L/s, 264 gpm
30 HP	Max : 70m, 230ft	Max : 33.3 L/s, 528 gpm

Solid Passage : 15 mm, 0.6 in

Pump Type	Electric Submersible Pumps	
	3-Phase	
Motor	Type	Induction Motor
	Poles	2 Pole
	Insulation	Class F
	Protector	Circle Thermal Protector
	Starter	D.O.L.
Lubricant	Food Grade (ISO VG32)	
Impeller Type	Opened	
Shaft Seal	Double Mechanical Seal	
	Silicon Carbide VS Ceramic / Carbon	
Bearings	C3 Shielded ball bearings	
Cable	PVC (CSA Certified) / H07BQ-F	
	10m (33ft) or longer upon request.	
Materials	Pump Casing	Gray Iron
	Impeller	Chromium Iron
	Motor Frame	Gray Iron
	Motor Shaft	Stainless Steel
	Strainer	Stainless Steel
Max. Liquid Temperature	40°C (104°F)	
Max. Submersion Depth	20m (66ft)	
pH Range	pH 5 - pH 8	

VISIT SITE NOW >>